



Metrologic

Local Supplier:

Anchor Data Systems (NI) Ltd

Unit 36 North City Business Centre, Duncairn Gardens, Belfast, Co. Antrim, BT15 2GG

Tel: 028 9074 0315 Email: enquiries@AnchorData.co.uk Web: www.AnchorData.co.uk

Voyager

Features

- Auto-trigger with **CodeGate™**
- Both hand-held and fixed projection
- PowerLink, user-replaceable cables
- Flash ROM with Meteor upgrade utility
- MetroSet™ & MetroSelect™ configuration
- Bits 'n' Pieces™ data editing
- Includes adjustable stand
- Short-range and long-range activation
- MetroPOS™ compatible
- EMI rating of Class B



Metrologic's MS9500 Series Voyager™

has been cleared for takeoff! With a futuristic design and advanced scanning system, Voyager is the most advanced single-line, hand-held bar code scanner on the market today.

The Voyager MS9540 features Metrologic's proprietary CodeGate technology. CodeGate is an intuitive scanning system that is ideal for all scanning applications, including menu-scanning, Point-of-Sale, document processing, and inventory, just to name a few.



CodeGate works hand-in-hand with Metrologic's patented automatic-triggering scheme. Simply present a bar code to the scanner; the highly visible 650-nanometer laser is automatically activated allowing the user to easily select the bar code to be scanned. Press the CodeGate button and the data is transmitted to the host system.

Equipped with both In-Stand and Out-of-Stand operation, Voyager can be used as both a hand-held and fixed projection scanner. Voyager automatically senses when it is placed in the stand and de-activates the CodeGate button.



Voyager

OPERATIONAL

Light Source	Visible Laser Diode 650 nm \pm 10 nm
Laser Power	0.96 mW (peak)
Depth of Scan Field	0 mm - 203 mm (0" - 8") for 0.33 mm (13 mil) bar code at default setting
Width of Scan Field	64.0 mm (2.5") @ face; 249 mm (9.8") @ 203 mm (8.0")
Scan Speed	72 \pm 2 scan lines per second
Scan Pattern	Single scan line
Minimum Bar Width	0.127 mm (5.0 mil)
InfraRed Activation	Long Range: 0 mm - 279 mm \pm 51 mm (0" - 11" \pm 2") Short Range: 0 mm - 102 mm \pm 25 mm (0" - 4" \pm 1")
Decode Capability	Autodiscriminates all standard bar codes; for other symbologies call Metrologic
System Interfaces	RS232, PC Keyboard Wedge, Stand-Alone Keyboard, OCIA, IBM 468X/469X, Light Pen Emulation
Print Contrast	35% minimum reflectance difference
Number Characters Read	Up to 80 data characters (Maximum number will vary based on symbology and density)
Roll, Pitch, Yaw	42°, 68°, 52°
Beeper Operation	7 tones or no beep
Indicators (LED)	Green = laser on, ready to scan Red = good read Yellow = CodeGate™ active (off); auto-trigger mode (on)

MECHANICAL

Length	198 mm (7.8")
Width-Handle	45 mm (1.8")
Width-Head	78 mm (3.1")
Depth	40 mm (1.6")
Weight	149 g (5.25 oz)
Cable	Standard 2.7 m (9') coiled; optional 2.1 m (7') straight

ELECTRICAL

Input Voltage	5 VDC \pm 0.25 V
Power - Operating	0.825 mW
Power - Standby	0.600 mW
Current - Operating	165 mA typical @ 5 VDC
Current - Standby	120 mA typical @ 5 VDC
DC Transformers	Class 2; 5.2 VDC @ 650 mA
Laser Class	CDRH: Class II; EN60825-1:1994/A11:1996 Class 1
EMC	FCC Class B

ENVIRONMENTAL

Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-40°C to 60°C (-40°F to 140°F)
Humidity	5% to 95% relative humidity, non-condensing
Light Levels	Up to 4842 Lux (450 footcandles)
Shock	Designed to withstand 1.5 m (5') drops
Contaminants	Sealed to resist airborne particulate contaminants
Ventilation	None required

Specifications subject to change without notice.
Copyright January 2000.
Metrologic, All rights reserved.
MLPN: DSMS9500



USA
Metrologic Instruments, Inc.
Tel: 1-800-ID-METRO
Fax: 1-609-229-6673
info@metrologic.com

South America
Metrologic Instruments
Tel: 55-11-5505-6568
Fax: 55-11-5505-1681
info@sa.metrologic.com

Brazil
Metrologic do Brasil Ltda
Tel: 55-11-5505-2286
Fax: 55-11-5507-2201
info@br.metrologic.com

Asia
Metrologic Asia (Pte) Ltd
Tel: 65-642-7155
Fax: 65-642-7166
info@sg.metrologic.com

Metrologic Instruments GmbH | Dornierstrasse 2 | 82178 Puchheim, Germany
Tel: +49 (0) 89 89 019 0 | Fax: +49 (0) 89 89 019 200 | Email: info@europe.metrologic.com

REGIONAL OFFICES

Germany
Metrologic Instruments GmbH
Dornierstrasse 2, 82178 Puchheim
Tel: +49 (0) 89 89 019 0
Fax: +49 (0) 89 89 019 200
Email: info@europe.metrologic.com
www.metrologic-instruments.de


Italy
Metrologic Instruments Italia s.r.l.
Via Emilia 68, 40064 Ozzano dell'Emilia (BO)
Tel: +39 (0) 5 16 51 19 78
Fax: +39 (0) 5 16 52 13 37
Email: info@it.metrologic.com
www.metrologic.it

Spain
Metrologic Eria Iberica
Julian Camarillo 29, Edificio Diapason, 28037 Madrid
Tel: +34 (91) 3 27 24 00
Fax: +34 (91) 3 27 30 29
Email: info@es.metrologic.com
www.metrologic.es


France
Metrologic Eria France SA
63 Rue de la Belle Etoile, ZI Paris Nord II, BP 50067
93947 - ROISSY CDG CEDEX France
Tel: +33 (0) 1 48 63 78 78
Fax: +33 (0) 1 48 63 24 94
Email: info@fr.metrologic.com
www.metrologic-eria.fr

United Kingdom
Metrologic Instruments UK Ltd
58 Tempus Business Centre, Basingstoke Hampshire RG21 6XG
Tel: +44 (0) 1256 365900
Fax: +44 (0) 1256 365955
Email: info@uk.metrologic.com
www.metrologic.co.uk


Scan Area

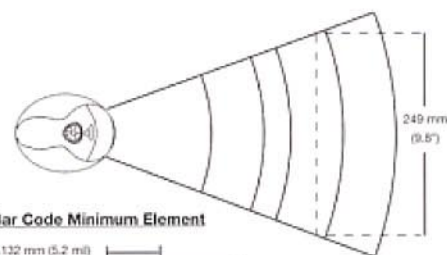


Bar Code Minimum Element

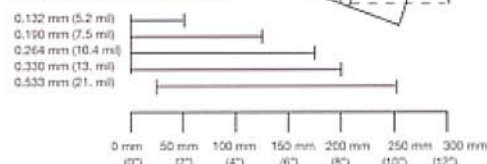

IR Activation and Scan Width

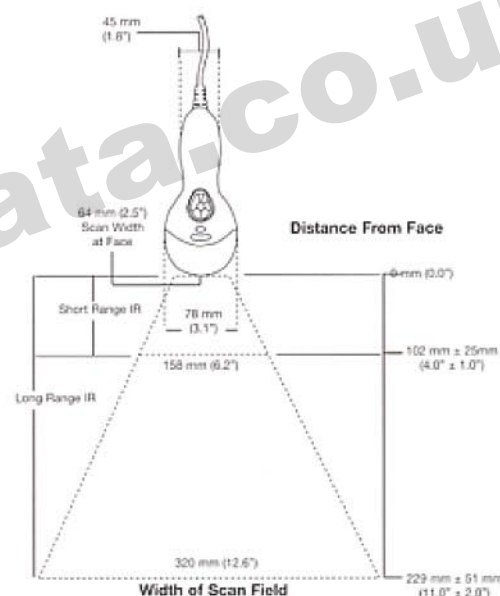

Dimensions



Metrologic®
www.europe.metrologic.com