




Anchor Data Systems (NI) Ltd

Unit 36 North City Business Centre, Duncairn Gardens, Belfast, BT15 2GG

Tel: 028 9074 0315 www.AnchorData.co.uk enquiries@AnchorData.co.uk

THERMAL LABEL PRINTER

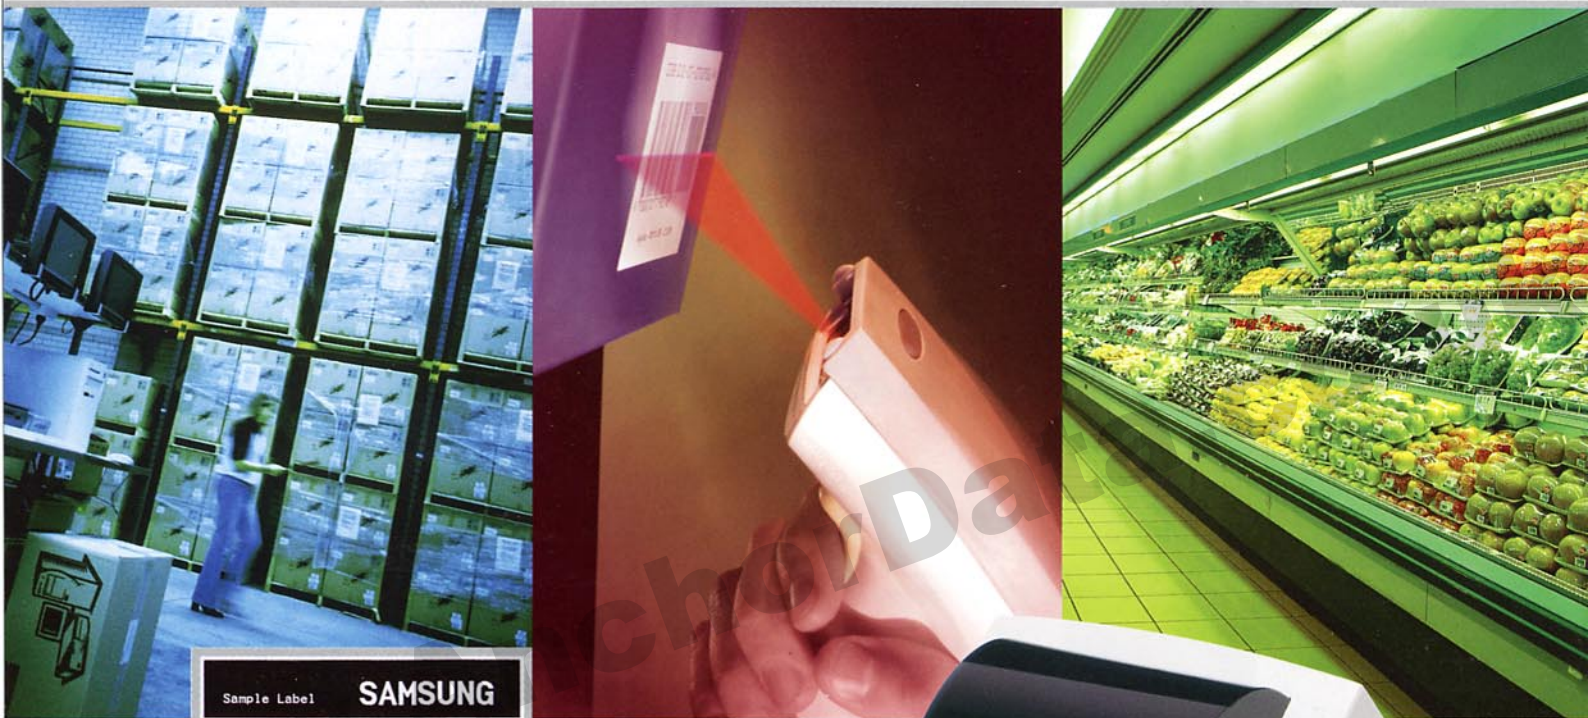

Variable barcode types available (1D/2D)

Just some of applications

- Retail.
- Medical.
- Manufacturing.
- Logistics.
- Quality control.
- Security.
- Warehousing.
- Pre-packing.



Back side paper loading

Peel-off (Dispenser) standard

Serial, USB & Parallel ports as standard!

SRP-770

Thermal Label Printer

The Samsung SRP-770 direct thermal label printer provides top quality label printing for any application. With a print speed of 5 inches per second the SRP-770 will keep pace with demand. High print definition ensures excellent read quality, even with the smallest text and the latest bar codes.

SRP-770

T H E R M A L L A B E L P R I N T E R

• Dimension



• Easy Paper Loading



• Indicator



• Multiple Interfaces



- USB Interface
- Parallel Interface
- Serial Interface

■ Features

- Most bar code types available
 - 1D type (10 kinds)
 - 2D type (2 kinds)
- Versatile fonts supported
- Logo printing (BMP, PCX file)
- Template supported
- Wide selection of application
- Peel-off (dispenser) standard
- Powerful label design program
 - SAMLABEL, Max, Pro versions

■ Specifications

MODEL		SRP-770
PRINT	Printing Method Printing Speed Resolution Print Width	Direct Line Thermal 5 IPS (127 mm/sec) 200 dpi (8 dot/mm) 1" (25.4 mm) - 4" (101.6 mm)
PAPER	Paper Type Paper Width Paper Length Thickness Sensor Paper Roll Diameter	Labels, tag, continuous, Fan-fold 1.5" (38.1 mm) - 4.1" (104.1 mm) 0.6" (15.2 mm) - 12" (304.8 mm) 0.08 ~ 0.18 mm Gap, Black mark, notch I.D 1" (25.4 mm) ~ 1.5" (38.1 mm) O.D 5.1" (130 mm)
FONT AND GRAPHICS		7 resident bitmap fonts expandable up to 4X 7 code page Soft font storage BMP, PCX graphic supported
MEMORY	Flash SRAM	1MB (8Mb) 512KB (4Mb)
RELIABILITY	MCBF	20,000,000 lines
SOFTWARE	Driver Label Design Program Utilities	Windows 95, 98, Me, 2000, NT, XP, CE SAMLABEL, Max, Pro Available
INTERFACE		Serial (RS232), USB and Parallel
EMC Standards		FCC, CE marking (EMI class B)
Safety Standards		cUL, TÜV
POWER SUPPLY	Input Output Consumption	AC100 - 240, 50/60Hz, 1.5A DC24V, 3.75A Approx. 46W (Peak)
DIMENSIONS	W X L X H (mm) Weight	184 x 221 x 171 3.5Kg (Full packing)
BARCODES	1D Type 2D Type	Code39, Code128, Interleave 2 of 5 Codabar, Code93, UPC-A, UPC-E, EAN8, EAN13, UCC/EAN128 Maxicode, PDF417
PROGRAMMING		Manual supported
OPTIONS		3 kinds of label design program Asian language supported

• Peel Off (Dispenser)



• Back Side Paper Loading



HEAD OFFICE & SALES DEPT.
FactoryWorld 705, 332-2, Wonchon Dong,
Paldal Gu, Suwon, Kyunggi Do, Korea, 442-822
TEL : +82-31-218-5522 FAX : 82-31-218-5589
http://www.samsungminiprinters.com

Distributed by :

Anchor Data Systems (NI) Ltd

Unit 36 North City Business Centre, Duncairn Gardens, Belfast, BT15 2GG

Tel: 028 9074 0315 www.AnchorData.co.uk enquiries@AnchorData.co.uk

* Design & Specifications are subject to change without notice.
2003. 02